


3



with louvre




with icocrystal diffuser



IP20

IP44



Type Part-no.	230V/ 50Hz/ h.p.f.c.	230V/ 60Hz/ h.p.f.c.	Weight kg
2x18W	5111 0054 00-016	5111 0054 00-003	3.7
2x36W	5111 0059 00-003	5111 0059 00-004	6.7

other voltages on request

### Application

passage ways, cabins, lounges, dining rooms, accomodation areas

### Approvals

according to the rules of relevant classification societies, additional VDE and IEC

### Protection class

with diffuser: IP 44  
in conjunction with ceiling with louvre: IP20

### Housing

zinc coated steel, powder coated white

### Diffuser

polycarbonate icocrystal, clear

### Lamp base

G 13

### Lamps (not included)

fluorescent lamp 18W/36W

### Electric

flexible wiring, heat resistant up to +105°C

### Cable entry


2 cable entries, Ø 20 mm

### Mounting

18W: 4 mounting brackets, 36W: 6 mounting brackets  
cut out  
18W: 635 x 240 mm  
36W: 1235 x 240 mm

### Options

- electronic ballast
- different louvers and diffusers on request
- emergency battery backup

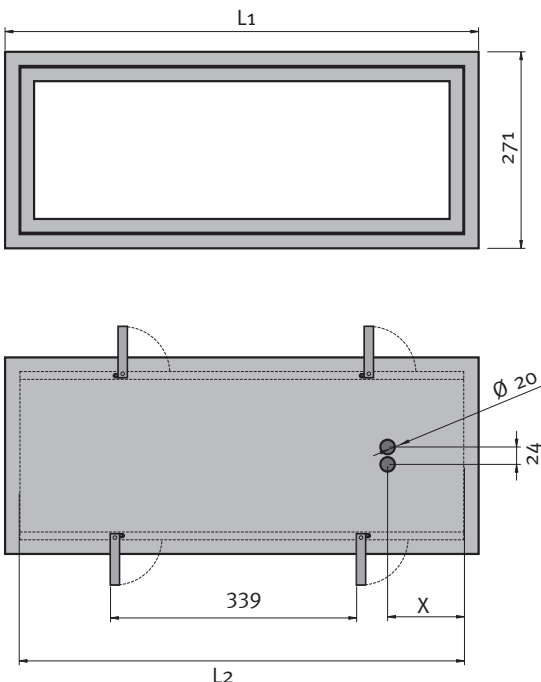

[mm]

Type	L1 mm	L2 mm	x mm
DE29 / 2x18W	653	614	106
DE29 / 2x36W	1246	1224	95